



6 x 6 Regular Series (RLI)

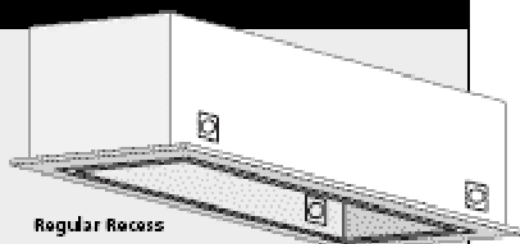

Regular Recess

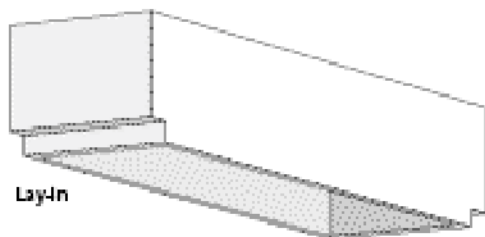

Lay-In

GENERAL DESCRIPTION

A linear 6 x 6 recessed fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas, 6 x 6 Series fixtures can be hung individually or in group patterns.

SPECIFICATIONS

Housing: Die-formed and welded 21-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting.

Diffusers (not included): Fixture accepts various lenses or louvers. Optional welded "light leak" hinges are available on ends. 6' and 8' units have a steel mullion to join two individual diffusers.


Finish: All metal parts are cleaned and treated with a three-stage phosphate coating, then electrostatically sprayed with high quality baked white enamel. Minimum 87% reflectivity.

Mounting: Fixtures can be installed in various types of recessed ceilings. Levelling lugs (not included) are available to support regular recess units; order number RRLG & SC-5M.

Ordering Information: Minimum quantities may be required. Please consult your representative or the factory.

NOTES

Dimensions subject to change without notice.

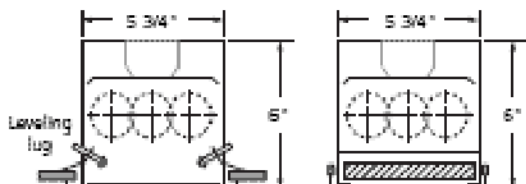

Regular Recess. Available in flat flange or regress flange.

RRL

Lay-In. Available in flat flange or regress flange.

LI



LIGHTING
SOLUTIONS