


# 6 x 6 Wall Mount (WM)

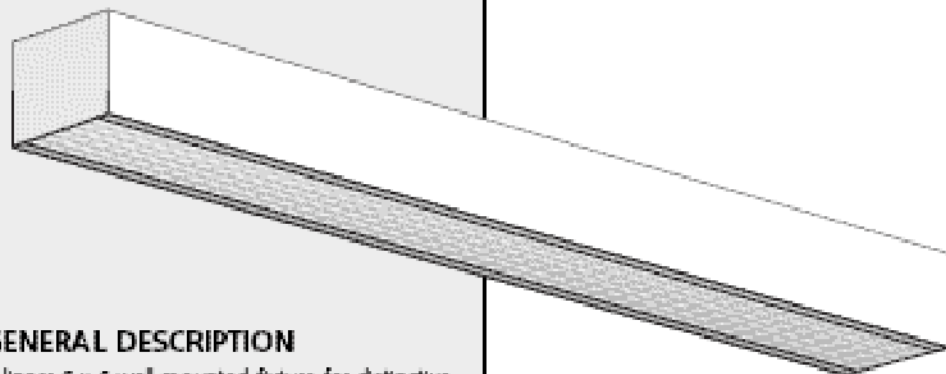

## GENERAL DESCRIPTION


A linear 6 x 6 wall-mounted fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas, 6 x 6 Wall Mount Series fixtures can be installed individually or in continuous rows.

## SPECIFICATIONS

**Housing:** Die-formed and welded 21-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom ensures uniformity and rigidity. Uplight fixtures have two rows of 1/2" x 4" apertures along the top of the housing to provide approximately 12% uplight for ceiling illumination. Indirect/direct fixtures have a 3" opening along the length of the fixture to provide from 35% to 50% ceiling and wall illumination.


**Diffusers (not included):** Fixture accepts various lenses or louvers. Optional welded "light leak" hinges are available on ends. 6' and 8' units have a steel mullion to join two individual diffusers.

**Finish:** All metal parts are cleaned and treated with a three-stage phosphate coating, then electrostatically sprayed with high quality baked white enamel. Minimum 87% reflectivity.

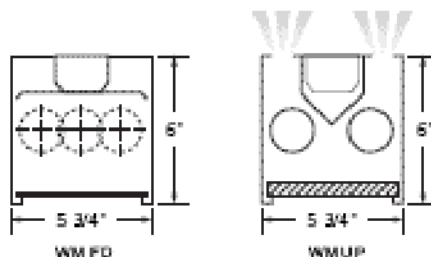


WM FD

WM UP



Direct/Indirect (shown with wall bracket)  
WM DI

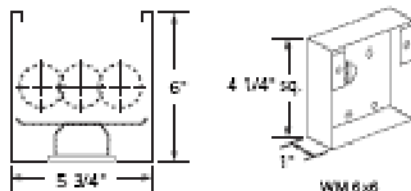

WM I

WM 6x6